


COMFORT HI 3-SEATER

PRODUCT-DETAIL.MODEL-9396.223

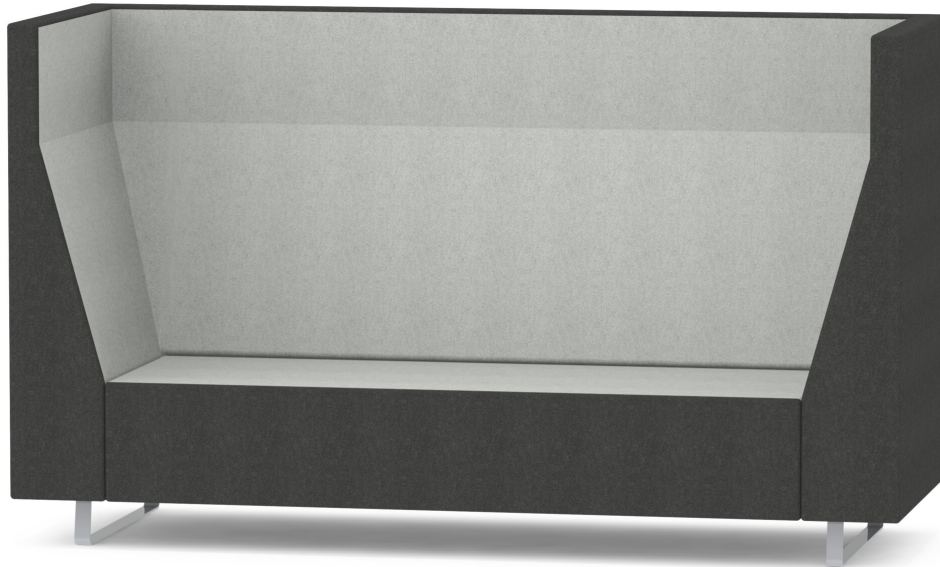

STANDARD VERSION

Upholstery over foam, colors of backrest and seat separately selectable within a fabric group. Substructure of robust 3-layer chipboard. Sturdy skid frame with felt floor protector, powder-coated in RAL 9006 or chrome-plated as standard.

OPTIONS

- Upholstery fabric TAFF B1 (P-a certified)
- Upholstery fabric TAFF B1 (price group 2)
- Upholstery fabric price group 3
- Upholstery fabric KUNSTLEDER B1 (P-a certified)
- Cover fabric ARTIFICIAL LEATHER B1 (price group 4)
- Upholstery fabric PROTEX B1 (P-a certified)
- Upholstery fabric PROTEX B1

CONFIGURATION

- Upholstery fabrics | INTENSIVE Price group 1, SKANDIA Price group 1, FLEECE Price group 1, TAFF B1 Price group 2, WOOL Price group 3, PROTEX Price group 3, ARTIFICIAL LEATHER Price group 3, ARTIFICIAL LEATHER B1 Price group 4

STANDARD

DIN EN 16139, DIN EN 15372

FEMB level:2017 (Level 3)

for cover fabrics B1, optional:
highest certified fire protection safety according to DIN 66084 P-a (paper cushion test)

TECHNICAL SPECIFICATIONS

TOTAL WIDTH	220 cm
SEAT WIDTH	170 cm
TOTAL HEIGHT	132 cm
SEAT HEIGHT	44 cm
TOTAL DEPTH	82 cm
SEAT DEPTH	59 cm
WEIGHT	1.8 kg

Our range of materials and colors can be found in the A2S material overview.



A2S-Furnishing Systems Ltd.
ASS-Einrichtungssysteme GmbH
info@ass.de
WWW.A2S.COM

COMFORT HI 3-SEATER

PRODUCT-DETAIL.MODEL-9396.223



BENEFITS/SPECIALS



Stable sled frame



Sound insulation through sound-absorbing foam in backrest



Ideal as a room-in-room solution



DIN 66084 P-a

Optionally fire protection certified according to DIN 66084 P-a with cover fabric B1

FABRIC PROPERTIES

INTENSIVE Price group 1

100% polyester | flame retardant according to EN 1021 1&2 | 250 g/m² +/-5% | 100,000 Martindale tours | linting 5 | ÖKO-Tex 100

SKANDIA Price group 1

100% polyester | flame retardant according to EN 10211 | 245 g/m² +/-5% | 70,000 Martindale tours | linting 4-5 | ÖKO-Tex 100

FLEECE Price group 1

100% polyester | flame retardant BS 5852:Part1:1979 (cigarette) | 402 g/m² | 100,000 Martindale tours | linting 4 | ÖKO-Tex 100

TAFF B1 Price group 2

100% polyester | flame retardant according to EN 1021 1&2, DIN 4102 B1 | 260 g/m² +/-5% | 70,000 Martindale tours | linting 5 | ÖKO-Tex 100

WOOL Price group 3

100% wool | flame retardant according to EN 1021 1&2 | 460 g/m² +/-5% | 35,000 Martindale tours | linting 4 | tested for harmful substances

PROTEX Price group 3

surface 100% vinyl / fabric 100% polyester | flame retardant according to EN 1021 1&2, DIN 4102 B2 | 685 g/m² | 300,000 Martindale tours | no linting | wipeable with soap and water, water repellent, antibacterial, anti-static, stain resistant, resistant to blood and urine, mold resistant backing and surface, resistant to disinfectants

ARTIFICIAL LEATHER Price group 3

surface 100% polyurethane/ fabric 65% polyester, 35% cotton | flame retardant according to EN 1021-1 | 435 g/m² +/-10% | 100,000 Martindale tours | no linting | tested for harmful substances

ARTIFICIAL LEATHER B1 Price group 4

85% PVC compound, 15% cotton knit | flame retardant according to EN 1021 1&2, DIN 4102 B1 | weight 780+/-50 g/m² | 75,000 Martindale tours | no linting | tested for harmful substances | resistant to blood and urine, resistant to disinfectants