


# JOYN RECTANGULAR FLOOR MAT MODEL 5024.118

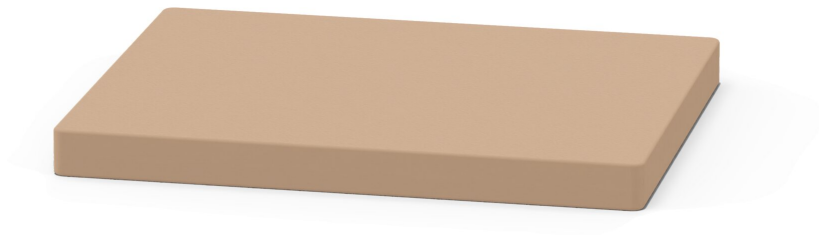

## STANDARD VERSION

Foam core on the inside, underside with anti-slip coating, flame-retardant to DIN 4102-1 B1 in light gray incl. zipper for removing the cover fabric.

## OPTIONS

- Upholstery fabric WOOL (price group 3)
- Upholstery fabric KUNSTLEDER B1 (P-a certified)
- Upholstery fabric PROTEX B1 (P-a certified)

## STANDARD

GS-certified according to DIN EN 16139, DIN EN 15372

for cover fabrics B1:

highest certified fire protection safety according to DIN 66084 P-a (paper cushion test)

## TECHNICAL SPECIFICATIONS

TOTAL WIDTH	100 cm
TOTAL HEIGHT	8 cm
SEAT HEIGHT	8 cm
TOTAL DEPTH	80 cm
WEIGHT	1 kg

Our range of materials and colors can be found in the A2S material overview.



A2S-Furnishing Systems Ltd.  
ASS-Einrichtungssysteme GmbH  
info@a2s.com  
WWW.A2S.COM

# JOYN RECTANGULAR FLOOR MAT MODEL 5024.118



## BENEFITS/SPECIALS



Optionally fire protection certified according to DIN 66084 P-a with cover fabric B1



Zipper with concealed zipper and anti-slip underside



High quality crosscut seam

## FABRIC PROPERTIES

### WOOL Price group 3

100% wool | flame retardant according to EN 1021 1&2 | 460 g/m<sup>2</sup> +/-5% | 35,000 Martindale tours | linting 4 | tested for harmful substances

### PROTEX Price group 3

surface 100% vinyl / fabric 100% polyester | flame retardant according to EN 1021 1&2, DIN 4102 B2 | 685 g/m<sup>2</sup> | 300,000 Martindale tours | no linting | wipeable with soap and water, water repellent, antibacterial, anti-static, stain resistant, resistant to blood and urine, mold resistant backing and surface, resistant to disinfectants

### ARTIFICIAL LEATHER B1 Price group 4

85% PVC compound, 15% cotton knit | flame retardant according to EN 1021 1&2, DIN 4102 B1 | weight 780+/-50 g/m<sup>2</sup> | 75,000 Martindale tours | no linting | tested for harmful substances | resistant to blood and urine, resistant to disinfectants

### PROTEX B1 price group 4

surface 100% vinyl / fabric 100% cotton | flame retardant according to EN 1021 1&2, DIN 4102 B1 | 760<sup>g</sup>/m<sup>2</sup> | 300.000 tours Martindale | no linting

**SPECIAL PROPERTIES:** PERMABLOK3® - protection against germs, abrasion and stains: Antibacterial, antifungal, stain resistant, sulfide stain resistant, anti-fungal protection - mildew resistant backing and surface | disinfectant resistant, easy cleaning - wipeable with soap and water | antistatic surface

**Tested to:** ISO206B02 7/8 UV resistance | ISO 18184 & ISO 21702 virus-free surface to reduce corona virus | ISO 22196 for bacteria-free surface | ISO 16000 indoor air emission class A+

**Tested for:** Plasticizers and harmful substances - material requirements of toy standards EN 71-3 Safety of toys (migration of certain elements) and 2005/84/EC (phthalates in toys and childcare articles)